



Gerenuk[®] 500 Multilifter

ALL ADAPTABLE MULTI LIFTER

 Made in Denmark
 Pat. pend.

Gerenuk[®] 500 is a hydraulic, remote-controlled multilifter that can be adapted to all telescopic loaders, cranes and other lifting gear to lift practically every known building material.



Unique

 manipulation

Mount from any angle.

Unique handling

3D manipulation



Unique

 manipulation

The strong, and extremely precise head, on which the front system is mounted, has a sturdy design which means that the front system can rotate and tilt the elements in all directions. Consequently, the mounting options are almost unlimited.

Millimeter precise



Power is a factor, if you can control it. With the Gerenuk[®] 500 you can fit elements millimeter precise with the sensitive remote control. The whole HHI concept of Power & Precision applies to its full extend in the Gerenuk[®] 500 handling abilities.

Unique safety

400% overcapacity



A two-circuit vacuum system ensures that the suction discs always have 400% overcapacity. A visual - and an acoustic alarm ensure that the machine is not operated until the system has reached optimum suction power. This makes the vacuum system one of the safest systems in the world.

Unique

 manipulation

The primary unique feature of the Gerenuk[®] 500 is the ability to manipulate materials 360° in all directions. You can approach the mounting area from any angle, and adapt the load with the 3D feature. That is second to none.

Unique service

Remote service



The Gerenuk[®] 500 can go online and be remotely serviced. This enables speedy diagnostics, remote programming and tailored repairs. The onboard computer supervises all systems and reports any damage.

All round adaptability



You can adapt the Gerenuk[®] 500 to lifting any kind of building material, and you can mount the machine on any lifting host machine in your garage. Mount materials from 0 to 110 meters millimeter precise.





Gerenuk® 500 Multilifter

 Made in Denmark
 Pat. pend.


Technical data

Description	Value
Loading capacity	500 kg
Own weight	720 kg
Adaptor weight	Type specific
Machine min. width	1100 mm
Machine min. depth	900 mm
Machine min. height	1750 mm
Autonomy	8 hours
Side shift	200 mm
Telescopic arm	420 mm
Charging current	220 or 110 V
Battery specs.	2 x 152 Ah / 24 V
Charging time	10-100 % - 8 hours
Charging time	25-70 % - 1 hour

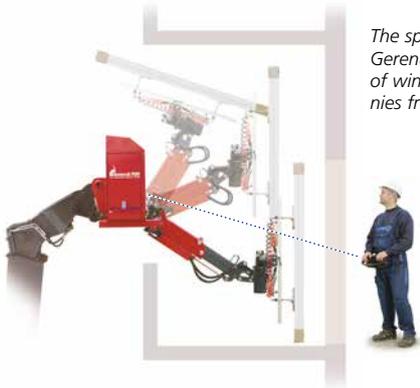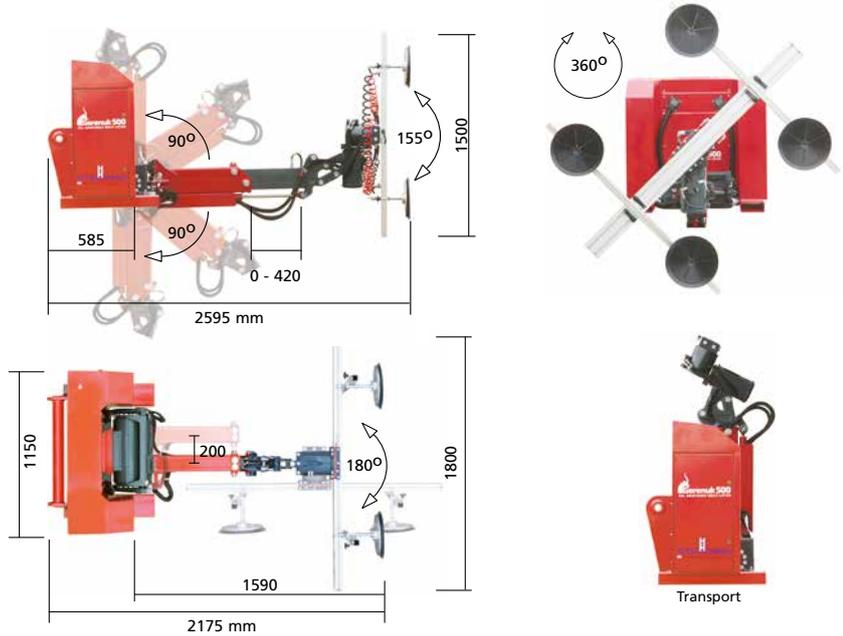

The special construction of the Gerenuk® 500 allow e.g. fitting of windows and doors on balconies from the outside.

Gerenuk® 500
 complies with the
 requirements
 of Machinery
 Directive 2006/42/EC.

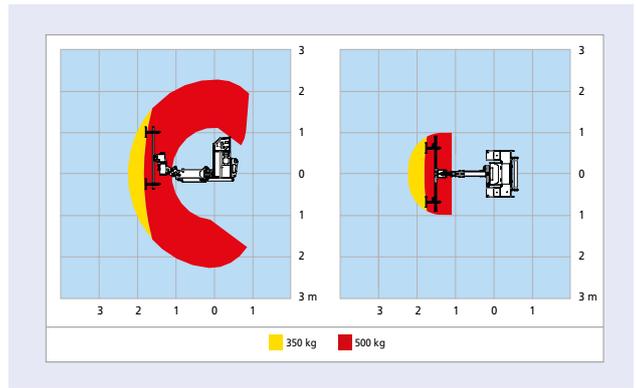

Unique adaptability

Materials



Host machines

Mount the Gerenuk® 500 on
 any hostmachine already in
 your possession.
 Mount building materials
 from 0 to 100 meters.



Production and sales:

HH-Intellitech ApS

Nykøbing Landevej 21
 4200 Slagelse
 Denmark

Phone +45 58 26 70 17
 E-mail: info@hh-intellitech.dk
www.hh-intellitech.dk